



PROPERTY / 特性	PC/ABS
Ingress protection / 防護等級(IEC 60529)	IP 68
Impact protection / 沖擊防護等級	IK 08
Standard color / 標準顏色	Dark gray / 深灰 (Cool Gray 7 C)
Temperature range / 溫度範圍 :	-40°C ~ + 80°C
Flammability / 防火等級	UL 94 V-0
UV resistance / 抗紫外線	UL746C (f1)
Salt spray / 鹽霧測試(IEC 60068-2-52)	
Insulation / 絕緣	回 完全絕緣
No toxic products / 無毒產品	Halogen free 無鹵素
Standard gasket material / 密封圈材質	Polyurethane foam / 聚氨酯

IP 68



ET series models


Option 選配

Dimensions	PG		Mounting bracket	Mounting plate	
W x H x D (Cover included)	Body PC+ABS	Cover PC+ABS		Steel	Plastic
	Gray cover			1.6mm	> 3mm
280 x 280 x 130	ET-PG-282813 F1			B50.00	M2828
280 x 380 x 130	ET-PG-283813 F1		M2838		2838 PL

Mounting bracket



■ B50

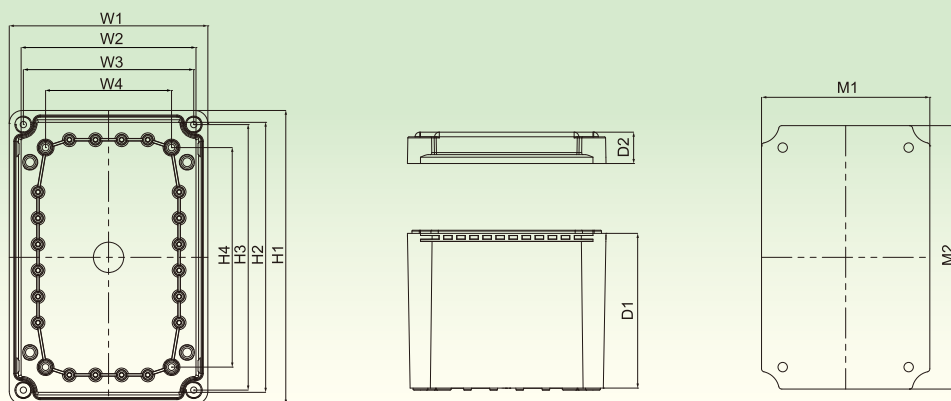

Dimensions (mm)

Tolerance: ±1.0mm

Model	W x H x D	W1	W2	W3	W4	H1	H2	H3	H4	D1	D2	Steel Plate		Plastic Plate	
												M1	M2	M1	M2
ET-□□-282813	280 x 280 x 130	280	257.5	255	210	280	257.5	255	210	100	30	251	251.5	249	249
ET-□□-283813	280 x 380 x 130	280	254.3	255	210.2	380	354.3	355	310	98	30	252	353.3	248	347.5